hydraulic
Our Precision•Your Success

Check Valve NG 10

cartridge, piloted

- Seat Valve

Specifications according to VDI 3267

General

Flow path		see diagramms
Type of valve		automatic seat valve,
Mounting method		M24x1,5; M=40Nm
Connection of port		location hole
Mounting positions		mountable in any position
Ambient temperature	°C	-5 to +50
Mass valve	kg	0,4

Hydraulic

Operating pressure range		
Ports A, B	bar	200
Hydraulic oil temperature	°C	-5 to +70
Viscosity range	mm^2/s	10 to 300
max. flow	l/min	60
Control ratio		6,25:1

Symbol:



Type code:

							R	V	y	-	1	0	E	3	0	0

Id.-Nr. (specified by the factory)
Check valve piloted

Design code
Mounting
Nominal size

Dimensions:

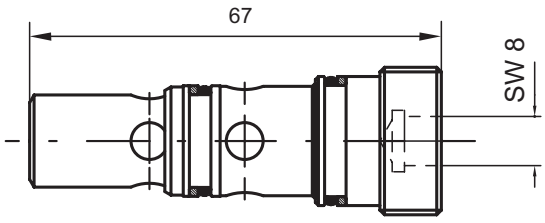

Location hole:

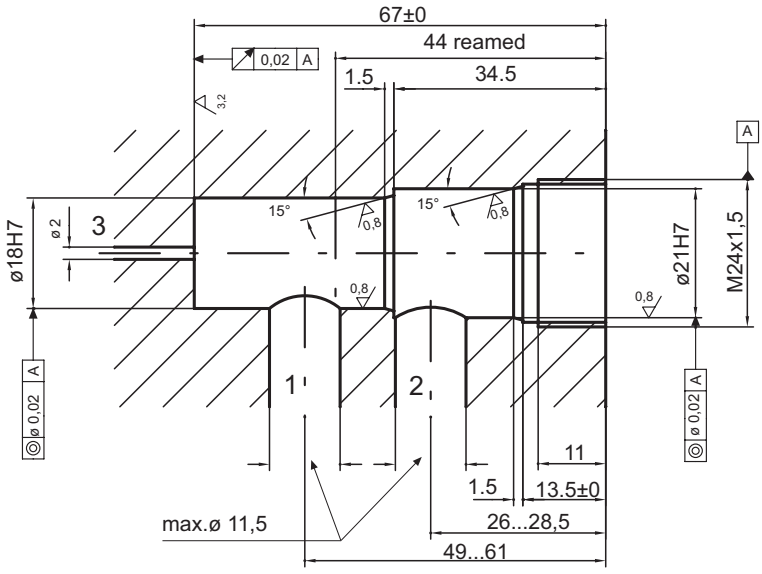

The specifications given herein are subject to alteration