

# JANUS CONTROL VALVES ZONE VALVE

A patented range of manifold mounted zone valves manufactured in 316 stainless steel for use within the high pressure water mist industry. The zone valve can be supplied fitted into a one to five station manifold, with pilot and solenoid operation. Various porting configurations are available; please contact TWHC with your specific requirements.




## Solenoid

- Solenoid actuated 12 or 24 volts for independent zone operation.
- Coil power 32 watts.
- Maximum pressure 160 bar.
- 0-60 l/min per zone.
- Available in sizes DN3 , DN9 and DN25

## Pilot

- Pilot actuated for independent zone operation.
- Pilot pressure 10 to 40 bar.
- Maximum pressure 160 bar.
- 0-60 l/min per zone.
- Available in sizes DN3 , DN9 and DN25
- ATEX approved

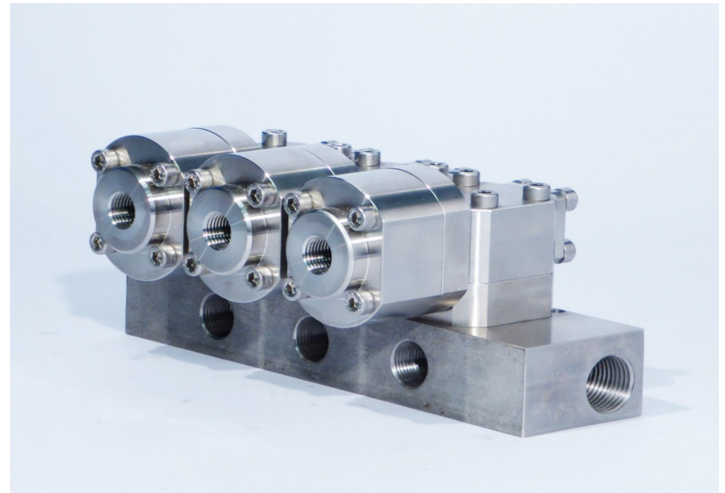

## Fully opened pressure drop against flow rates

